

T A
1
I35
v.33

UC-NRLF



B 2 869 330

YD 00278

~~ENGINEERING~~
~~LIBRARY~~

LIBRARY
OF THE
UNIVERSITY OF CALIFORNIA.

RECEIVED BY EXCHANGE

Class 421c

1833

UNIVERSITY OF ILLINOIS BULLETIN

Vol. VI.

MARCH 29, 1909

No. 24

[Entered Feb. 14, 1902, at Urbana, Ill., as second-class matter under Act of Congress July 16, 1894]

BULLETIN NO. 33

TESTS OF TUNGSTEN LAMPS

BY

T. H. AMRINE

AND

A. GUELL



UNIVERSITY OF ILLINOIS
ENGINEERING EXPERIMENT STATION

URBANA, ILLINOIS

PUBLISHED BY THE UNIVERSITY



14 15 16
17 18 19
20 21 22
23 24 25
26 27 28
29 30 31
32 33 34
35 36 37
38 39 40
41 42 43
44 45 46
47 48 49
50 51 52
53 54 55
56 57 58
59 60 61
62 63 64
65 66 67
68 69 70
71 72 73
74 75 76
77 78 79
80 81 82
83 84 85
86 87 88
89 90 91
92 93 94
95 96 97
98 99 100
101 102 103
104 105 106
107 108 109
110 111 112
113 114 115
116 117 118
119 120 121
122 123 124
125 126 127
128 129 130
131 132 133
134 135 136
137 138 139
140 141 142
143 144 145
146 147 148
149 150 151
152 153 154
155 156 157
158 159 160
161 162 163
164 165 166
167 168 169
170 171 172
173 174 175
176 177 178
179 180 181
182 183 184
185 186 187
188 189 190
191 192 193
194 195 196
197 198 199
200 201 202
203 204 205
206 207 208
209 210 211
212 213 214
215 216 217
218 219 220
221 222 223
224 225 226
227 228 229
230 231 232
233 234 235
236 237 238
239 240 241
242 243 244
245 246 247
248 249 250
251 252 253
254 255 256
257 258 259
260 261 262
263 264 265
266 267 268
269 270 271
272 273 274
275 276 277
278 279 280
281 282 283
284 285 286
287 288 289
290 291 292
293 294 295
296 297 298
299 300 301
302 303 304
305 306 307
308 309 310
311 312 313
314 315 316
317 318 319
320 321 322
323 324 325
326 327 328
329 330 331
332 333 334
335 336 337
338 339 340
341 342 343
344 345 346
347 348 349
350 351 352
353 354 355
356 357 358
359 360 361
362 363 364
365 366 367
368 369 370
371 372 373
374 375 376
377 378 379
380 381 382
383 384 385
386 387 388
389 390 391
392 393 394
395 396 397
398 399 400
401 402 403
404 405 406
407 408 409
410 411 412
413 414 415
416 417 418
419 420 421
422 423 424
425 426 427
428 429 430
431 432 433
434 435 436
437 438 439
440 441 442
443 444 445
446 447 448
449 450 451
452 453 454
455 456 457
458 459 460
461 462 463
464 465 466
467 468 469
470 471 472
473 474 475
476 477 478
479 480 481
482 483 484
485 486 487
488 489 490
491 492 493
494 495 496
497 498 499
500 501 502
503 504 505
506 507 508
509 510 511
512 513 514
515 516 517
518 519 520
521 522 523
524 525 526
527 528 529
530 531 532
533 534 535
536 537 538
539 540 541
542 543 544
545 546 547
548 549 550
551 552 553
554 555 556
557 558 559
560 561 562
563 564 565
566 567 568
569 570 571
572 573 574
575 576 577
578 579 580
581 582 583
584 585 586
587 588 589
590 591 592
593 594 595
596 597 598
599 600 601
602 603 604
605 606 607
608 609 610
611 612 613
614 615 616
617 618 619
620 621 622
623 624 625
626 627 628
629 630 631
632 633 634
635 636 637
638 639 640
641 642 643
644 645 646
647 648 649
650 651 652
653 654 655
656 657 658
659 660 661
662 663 664
665 666 667
668 669 670
671 672 673
674 675 676
677 678 679
680 681 682
683 684 685
686 687 688
689 690 691
692 693 694
695 696 697
698 699 700
701 702 703
704 705 706
707 708 709
710 711 712
713 714 715
716 717 718
719 720 721
722 723 724
725 726 727
728 729 730
731 732 733
734 735 736
737 738 739
740 741 742
743 744 745
746 747 748
749 750 751
752 753 754
755 756 757
758 759 760
761 762 763
764 765 766
767 768 769
770 771 772
773 774 775
776 777 778
779 780 781
782 783 784
785 786 787
788 789 790
791 792 793
794 795 796
797 798 799
800 801 802
803 804 805
806 807 808
809 810 811
812 813 814
815 816 817
818 819 820
821 822 823
824 825 826
827 828 829
830 831 832
833 834 835
836 837 838
839 840 841
842 843 844
845 846 847
848 849 850
851 852 853
854 855 856
857 858 859
860 861 862
863 864 865
866 867 868
869 870 871
872 873 874
875 876 877
878 879 880
881 882 883
884 885 886
887 888 889
890 891 892
893 894 895
896 897 898
899 900 901
902 903 904
905 906 907
908 909 910
911 912 913
914 915 916
917 918 919
920 921 922
923 924 925
926 927 928
929 930 931
932 933 934
935 936 937
938 939 940
941 942 943
944 945 946
947 948 949
950 951 952
953 954 955
956 957 958
959 960 961
962 963 964
965 966 967
968 969 970
971 972 973
974 975 976
977 978 979
980 981 982
983 984 985
986 987 988
989 990 991
992 993 994
995 996 997
998 999 1000



THE Engineering Experiment Station was established by action of the Board of Trustees December 8, 1903. It is the purpose of the Station to carry on investigations along various lines of engineering and to study problems of importance to professional engineers and to the manufacturing, railway, mining, constructional, and industrial interests of the State.

The control of the Engineering Experiment Station is vested in the heads of the several departments of the College of Engineering. These constitute the Station Staff, and with the Director, determine the character of the investigations to be undertaken. The work is carried on under the supervision of the Staff; sometimes by a research fellow as graduate work, sometimes by a member of the instructional force of the College of Engineering, but more frequently by an investigator belonging to the Station corps.

The results of these investigations are published in the form of bulletins, which record mostly the experiments of the Station's own staff of investigators. There will also be issued from time to time in the form of circulars, compilations giving the results of the experiments of engineers, industrial works, technical institutions, and governmental testing departments.

The volume and number at the top of the title page of the cover are merely arbitrary numbers and refer to the general publications of the University of Illinois; *above the title is given the number of the Engineering Experiment Station bulletin or circular, which should be used in referring to these publications.*

For copies of bulletins, circulars or other information, address the Engineering Experiment Station, Urbana, Illinois.

UNIVERSITY OF ILLINOIS
ENGINEERING EXPERIMENT STATION

BULLETIN No. 33

MARCH 1909

TESTS OF TUNGSTEN LAMPS

BY T. H. AMRINE, ASSOCIATE IN ELECTRICAL ENGINEERING
DEPARTMENT, ENGINEERING EXPERIMENT STATION
AND
A. GUELL, RESEARCH FELLOW, ELECTRICAL ENGINEERING

CONTENTS

	Page
I. Introduction.....	2
II. Description of Lamps.....	3
III. Electrical Characteristics.....	7
IV. Distribution.....	12
V. Life Tests.....	16
VI. Candle-Power Maintenance and Change in Efficiency	24
VII. Conclusions.....	31

I. INTRODUCTION

When the tungsten incandescent lamp was put on the market, about a year and a half ago, its high efficiency and excellent quality of light were in a large measure offset by the extreme fragility of its filament, its uncertain life and its high price. For instance, in October, 1907, when German tungsten lamps were just being introduced into this country, the Engineering Experiment Station bought a dozen of the 40-watt size (the smallest obtainable at that time) for testing purposes, at a cost of \$1.50 each. They came by express, packed with as much care and skill as was thought necessary, but when the lamps were received only five of the twelve had unbroken filaments, and these five had an average life of 50 or 75 hours only. This experience was a typical one with tungsten lamps at that time.

Since then many companies have entered the field of tungsten lamp manufacture, and they have all striven to overcome the faults common to those early lamps. In their attempts to make a lamp that would better withstand shipment and handling, that would not blacken and burn out early in its life and that could be burned in other than the vertical pendant position necessary with the first lamps, the manufacturers have developed several types of tungsten lamps. These differ considerably in two respects: (1) the method of manufacture; and (2) the scheme of mounting the filaments.

This bulletin describes a study of three prominent types of tungsten lamps, differing considerably in the above respects. This study was made with the idea of bringing out, as far as possible, the good as well as the poor points in the construction and manufacture of each type. There are included the results of tests showing what may be expected of the present day low wattage tungsten lamps in the way of life, maintenance of candle power and efficiency under different operating conditions.

II. DESCRIPTION OF LAMPS

Of the lamps chosen for the tests, one type was of American and two were of German manufacture. They will be designated as the *P*, *D* and *C* lamps, respectively. They represented three of the principal processes used in the manufacture, and three common schemes of mounting tungsten lamp filaments at the time the tests were started. All lamps tested were chosen from a lot of 100 of each type of lamp.

Rating.—All three lamps were rated at 25 watts at 110 volts and advertised to give an efficiency of 1.25 watts per candle-power. Fig. 1, 2 and 3 show the candle-power and watt per candle values for the individual lamps when new, and the average curve drawn through these points for the 100 lamps of each kind. It will be seen from the curves that the average watt per candle efficiency of the *C* lamps is somewhat poorer than the others. This can perhaps be explained by the fact that its filament is supported by three times as many spires as the other two, and hence more of

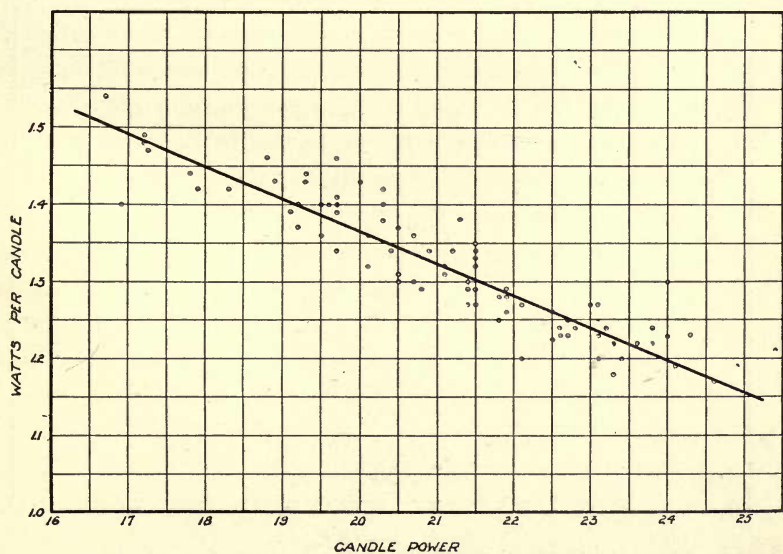


DIAGRAM SHOWING RATINGS OF 100 C LAMPS

Fig. 1

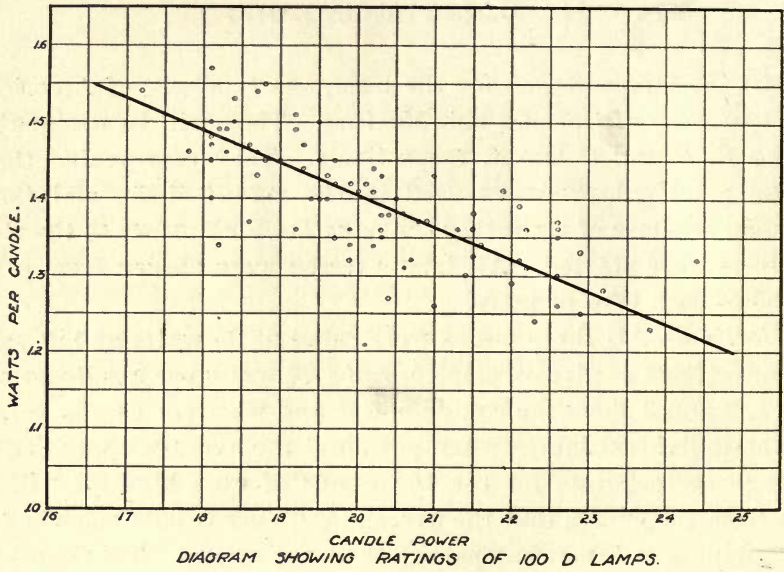


FIG. 2

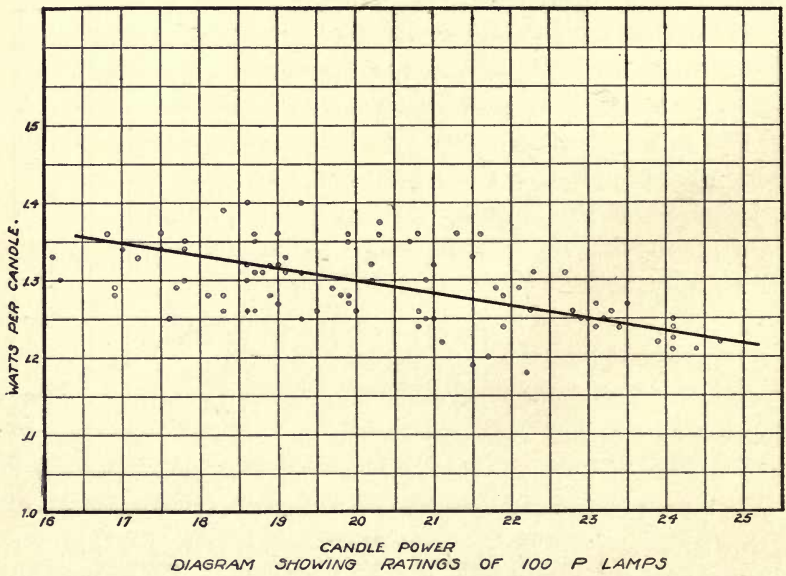


FIG. 3

the filament is kept cooled below incandescence. In the *D* and *P* lamps, each one of the tip end spires cools approximately $1/8$ inch of filament, so that it produces little or no light, while the spires at the base end each cool approximately $1/16$ inch. This makes about one inch of filament in each lamp that acts merely as a resistance. In the *U* lamp there are 16 spires, each cooling a short length, so that there are about 2 1-2 inches of ineffective filament so far as light production is concerned. This would account for the difference in efficiency between this lamp and the other two, since the main part of the filaments is operated at approximately the same temperature.

Filaments.—The filaments of the American lamp (*P*) were manufactured by the paste or Auer process. In this method, which is similar to the one used in making ordinary carbon filaments, finely powdered tungsten is mixed with a suitable binder, such as sugar or some other organic substance, and the resulting paste is squirted through a diamond die under great pressure. The moist filament so formed is then heated in an atmosphere of steam and hydrogen to remove the carbon of the binding material. This leaves a filament of almost pure tungsten. The filament, as mounted in the lamp, consists of four hairpin loops connected in series and mounted upon supporting spires. Connections between the loops are made at the base end of the stem by fusing together the filaments and the spires. The filaments are hung loosely on the spires so as to allow for the contraction that takes place after they have been burned for a time.

The filament of the first German lamp (*D*) is made by the deposition process. In this method a fine filament of carbon is heated in an atmosphere of some compound of tungsten, for instance, oxychloride of tungsten. This causes the metal to be deposited in a shell upon the carbon core. By the application of heat the tungsten and carbon are made to unite chemically to form tungsten carbide, which is then reduced and the carbon removed by a method similar to that employed in the paste process. The

filament in this lamp also consists of four loops, but the supporting spires at the tip end of the stem are very thin and flexible springs, and the filament is kept under a slight tension by their action. The flexibility of these spires also permits contraction of the filaments to take place. The entire glass stem which carries the filaments is mounted between two coil springs, as shown in Fig. 4. The object of these springs is to absorb the jar and vibration to which the lamp may be subjected and so prevent breaking the filament. Connections between the filament and spires at the base end of the stem are made by means of pasted joints.

The second German lamp (*C*) is made by the colloid process. In this method colloidal tungsten is formed either by maintaining an arc between tungsten electrodes under some liquid, it may be water, or by reducing tungstic trioxide with potassium cyanide. This plastic colloidal mass is brought to the proper consistency, and is then squirted through a die to form a filament, as in the paste process. The filament so obtained is dried and is gradually brought to a white heat in a nonoxidizing atmosphere, and is thereby converted into the crystalline state. The filament in this lamp, too, consists of four loops, each of which is mounted in a peculiar spiral shape and hung loosely enough to permit of contraction. The joints between the filaments and the base spires are fused as in the *P* lamp.

TABLE 1
DIMENSIONS OF FILAMENTS

Lamp	Total Length inches	Diameter inches	Total Area of Surface square inches
<i>C</i>	19.87	.00138	.0859
<i>D</i>	15.92	.00202	.1009
<i>P</i>	19.27	.00163	.0987

The shapes of the bulbs and their comparative sizes are shown in Fig 4. The bulb of the *P* lamp is identical with that on the ordinary 16 candle-power carbon lamps in use in this country.

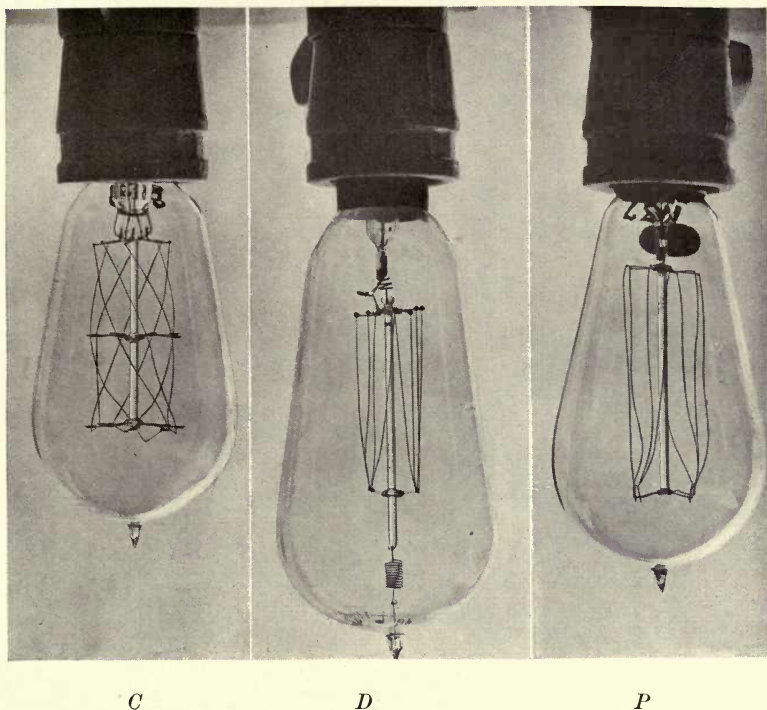


FIG. 4

III. ELECTRICAL CHARACTERISTICS¹

All three filaments, being of metal, have of course a positive temperature coefficient. Fig. 5 shows the temperature resistance curves for one lamp, selected at random from each of the three lots of lamps received. Fig. 6 is a curve between current and resistance that is typical of all three lamps.

As is the case with all lamps having filaments with a large positive temperature coefficient, the current, when first turned on, has a value several times greater than the normal operating value. Fig. 7 is a curve taken by means of an oscillograph, showing this change of current from the instant of starting. The very low re-

¹ In some of the curve sheets that follow, curves for only one kind of lamp are given. In these cases the results for all lamps are practically the same.

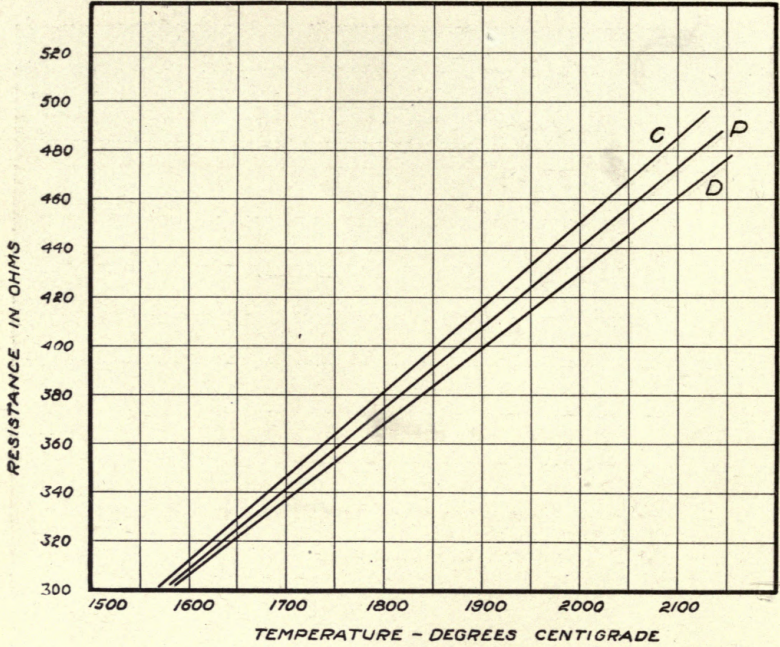


FIG. 5

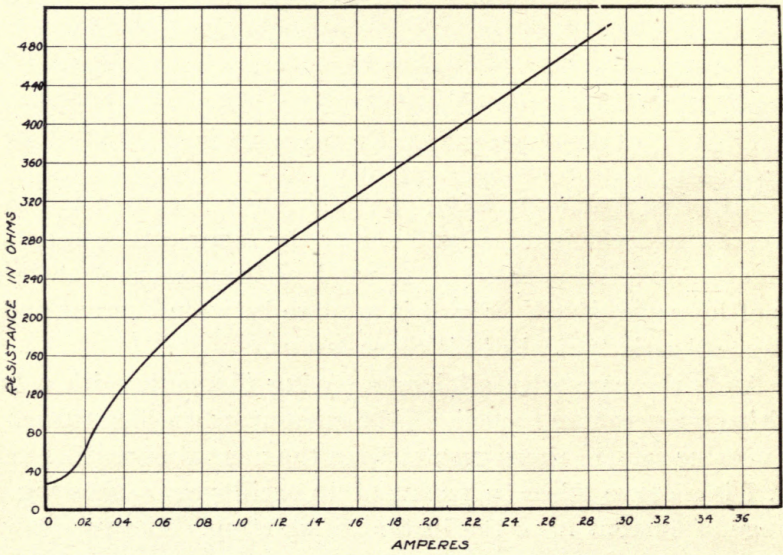


FIG. 6

sistance when the filament is cold, i. e., at zero current, as shown in Fig. 6, gives rise to a heavy rush of current at the first instant which quickly decreases, owing to the rapid increase of resistance as the filament heats up. This current rush, when the lamp is

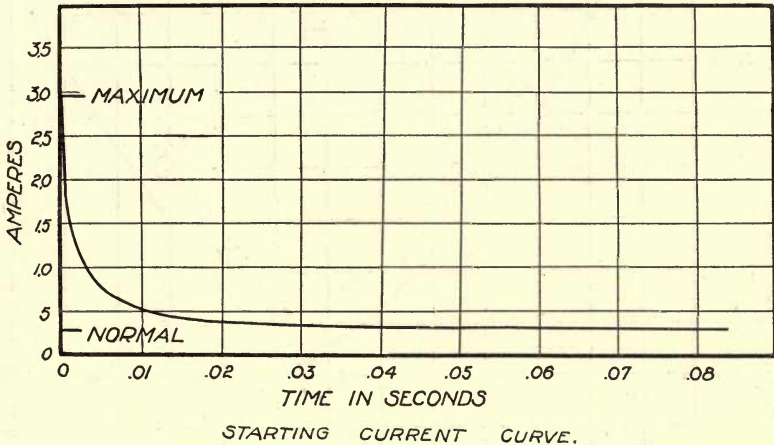


FIG. 7

turned on, causes the familiar flash or sudden rise in candle-power above normal, commonly known as overshooting.

The curves between candle-power and voltage, and between watts per candle and voltage, are shown in Fig. 8. The equation for the former, obtained by the method of least squares is

$$CP = 213.7 \times 10^{-8} \times E^{3.44}$$

Fig. 9 shows curves plotted between watts per candle and temperature,¹ for one lamp of each kind. These curves lie very close together, indicating that throughout the temperature range all three filaments give approximately equal watt per candle efficiencies for the same filament temperatures. Fig. 10 gives curves between temperature and spherical candle power per square inch of total filament area or emissivity. These indicate that the *C* lamp has the highest and the *D* lamp the lowest emissivity at all temperatures. This can be explained by an examination of the fila-

¹ The temperatures given in this bulletin are black body temperatures and are given as relative rather than absolute values.

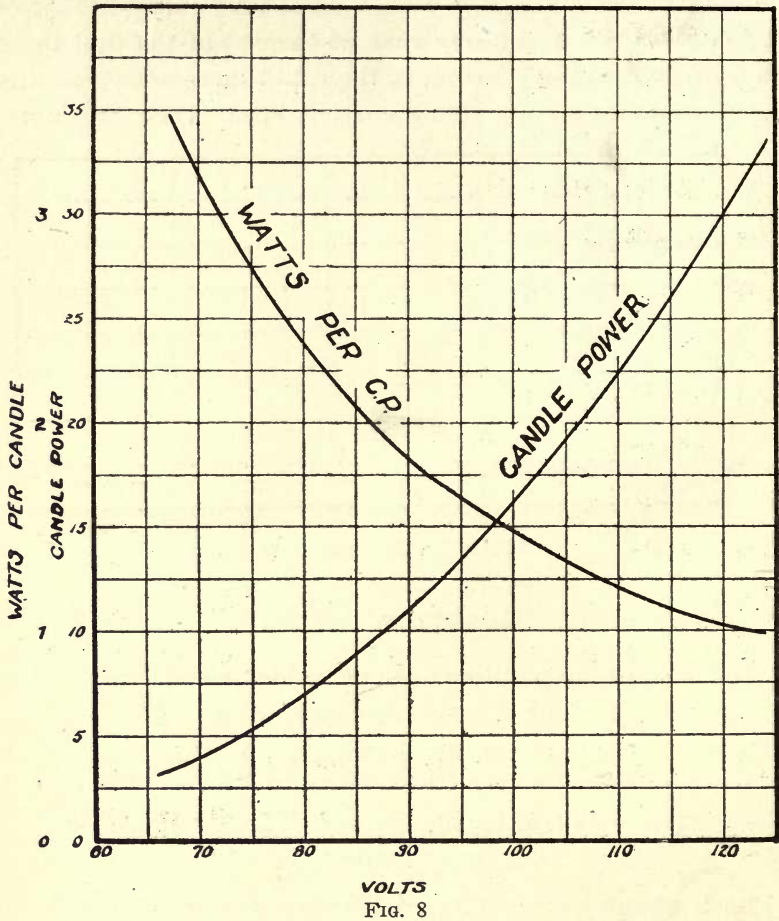


FIG. 8

ments under a microscope. Fig. 11 is a sketch of all three filaments showing their appearance when magnified. The *C* filament is seen to be the smoothest one of the three. It has no pits or protuberances, but has a smooth shiny surface broken only by what look like fine cracks similar to the fine check cracks sometimes seen in the glazes of porcelains. Such a smooth polished surface would naturally have a high emissivity. The *P* filament seems smooth, i. e., is free from knobs and protuberances, though it is covered with small depressions and wrinkles, probably due to the

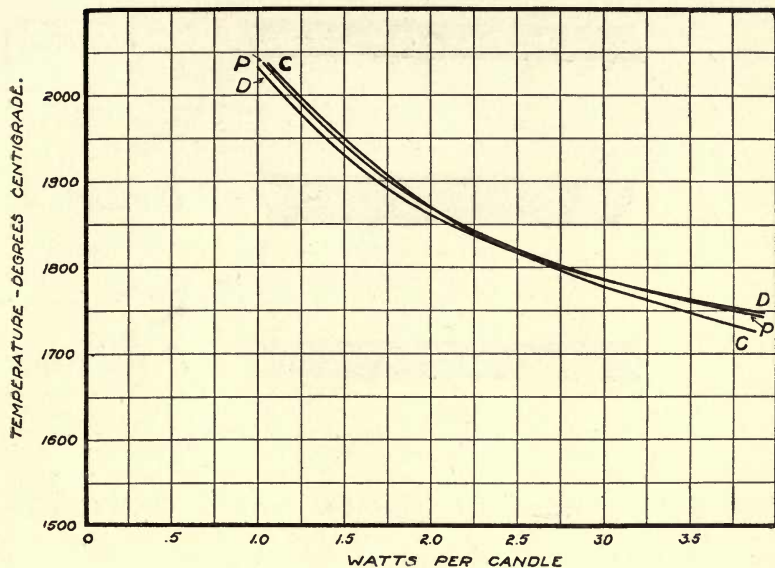


FIG. 9


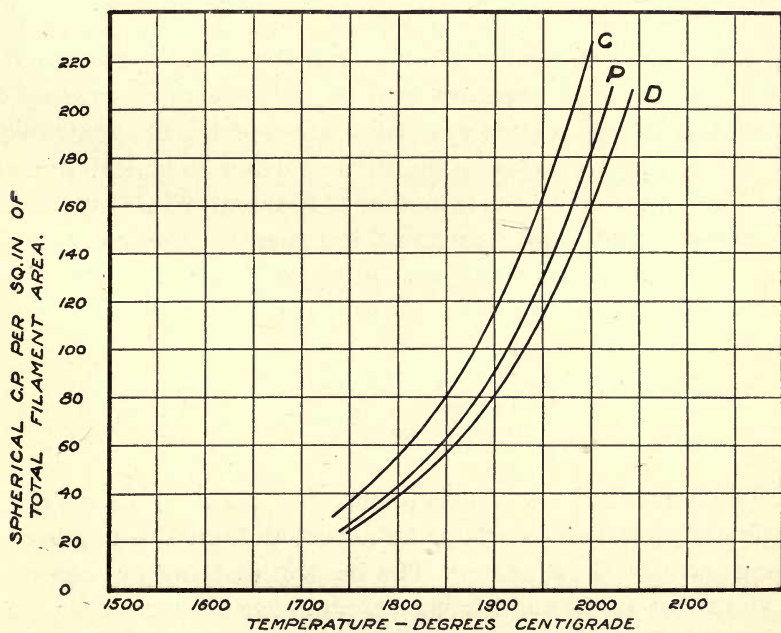


FIG. 10



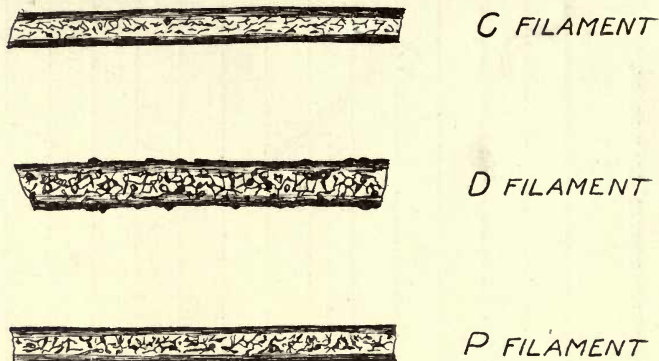


SKETCH OF NEW FILAMENTS WHEN MAGNIFIED.

FIG. 11

removal of the carbon of the binder and the consequent shrinkage. The lines shown on the filament in the sketch represent fine wrinkles rather than cracks on the surface of the filament. These depressions and wrinkles on the surface make its emissivity somewhat less than that of the smoother *C* filament. The *D* filament is the roughest and most uneven of the three. It is covered with many knobs and protuberances, pits and large wrinkles. This rough surface naturally has a lower emissivity than the other two lamps.


IV. DISTRIBUTION

The horizontal distribution curves for all three lamps are approximately circles, as would be expected from the number and arrangement of the filaments. The vertical distribution curves are shown in Fig. 12, 13 and 14. The *D* lamp has the lowest tip candle power, the *P* lamp next, and the *C* lamp the highest,—nearly 10

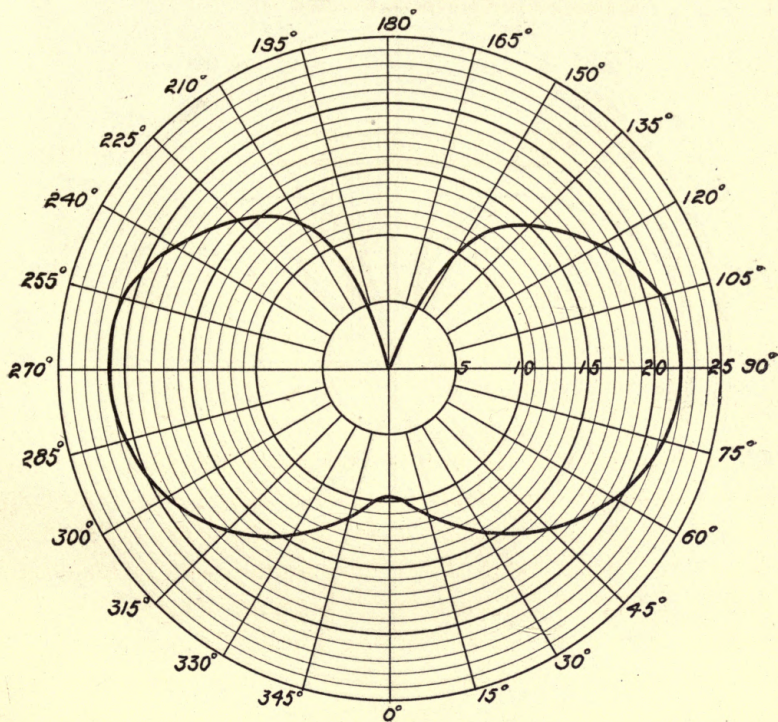


VERTICAL DISTRIBUTION OF C LAMP

FIG. 12

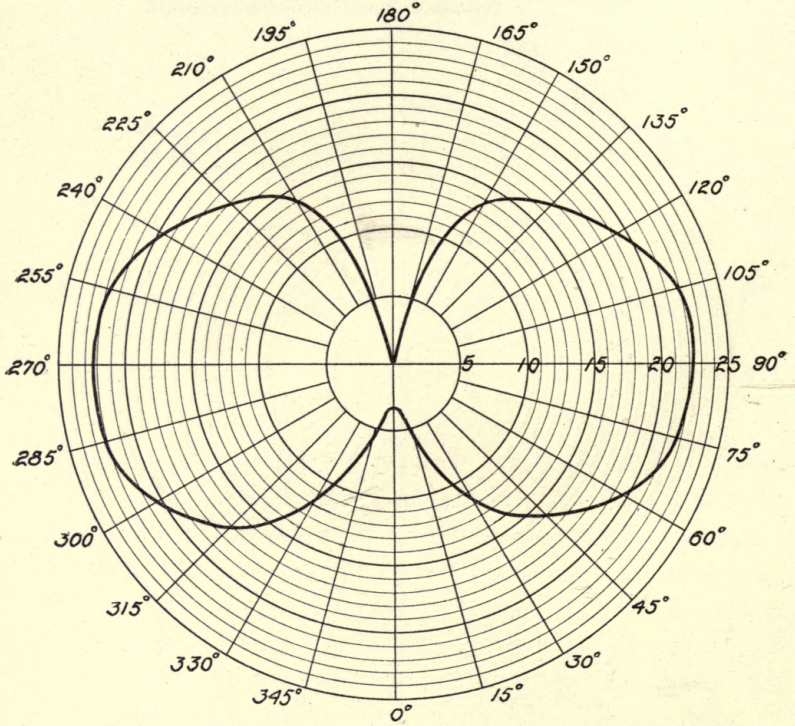

VERTICAL DISTRIBUTION OF D LAMP

FIG. 13

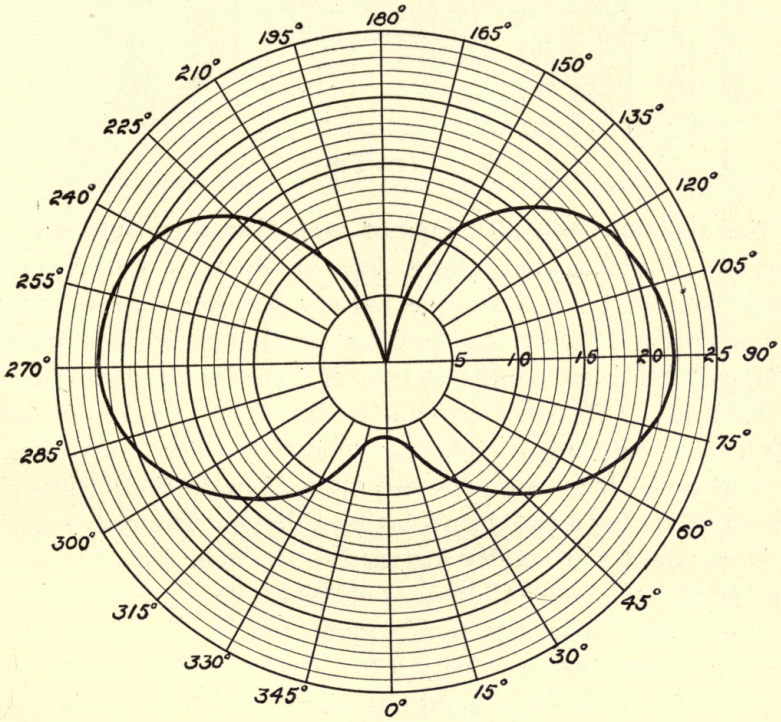

VERTICAL DISTRIBUTION OF P LAMP

FIG. 14

candle-power. The spherical reduction factors for the lamps are shown in the following table.


TABLE 2

Lamp	Mean Horizontal Candle Power	Mean Spherical Candle Power	Spherical Reduc- tion Factor
<i>C</i>	21.1	17.7	.840
<i>D</i>	22.2	16.2	.730
<i>P</i>	21.9	17.2	.785

V. LIFE TESTS


For the life tests, 50 lamps of each kind were selected. Of these, 25 of each kind were burned upon a well-regulated voltage, supplied by a storage battery floating across constant voltage mains. The racks holding the lamps were supported by three coil springs in order to protect them from the vibration of the building. This condition will be designated as A, and represents exceedingly good operating conditions. The remaining 25 lamps of each kind were operated upon 60-cycle alternating current mains having a badly fluctuating voltage. The rack supporting these lamps was rigidly fastened to the floor and received all of the vibration of the building. This vibration was caused by the engines of the University power plant and the machines in the electrical laboratory two floors below. It was great enough to be easily felt by placing the hand on the rack, and the lamps themselves could be seen to vibrate. It was not so severe a vibration as that to which lamps would be subjected in many manufacturing plants, but it was severe enough to represent rather trying operating conditions. This condition will be designated as condition B. Fig. 15 to 20 show the candle-power performance of each lamp on the life tests for both operating conditions.

In the life test under condition A, readings were taken up to 2000 hours. At the end of this time there was one *C* lamp, one *D* lamp and thirteen *P* lamps still burning. The method of mounting the filament of the *C* lamp is such that it is seldom that a brok-

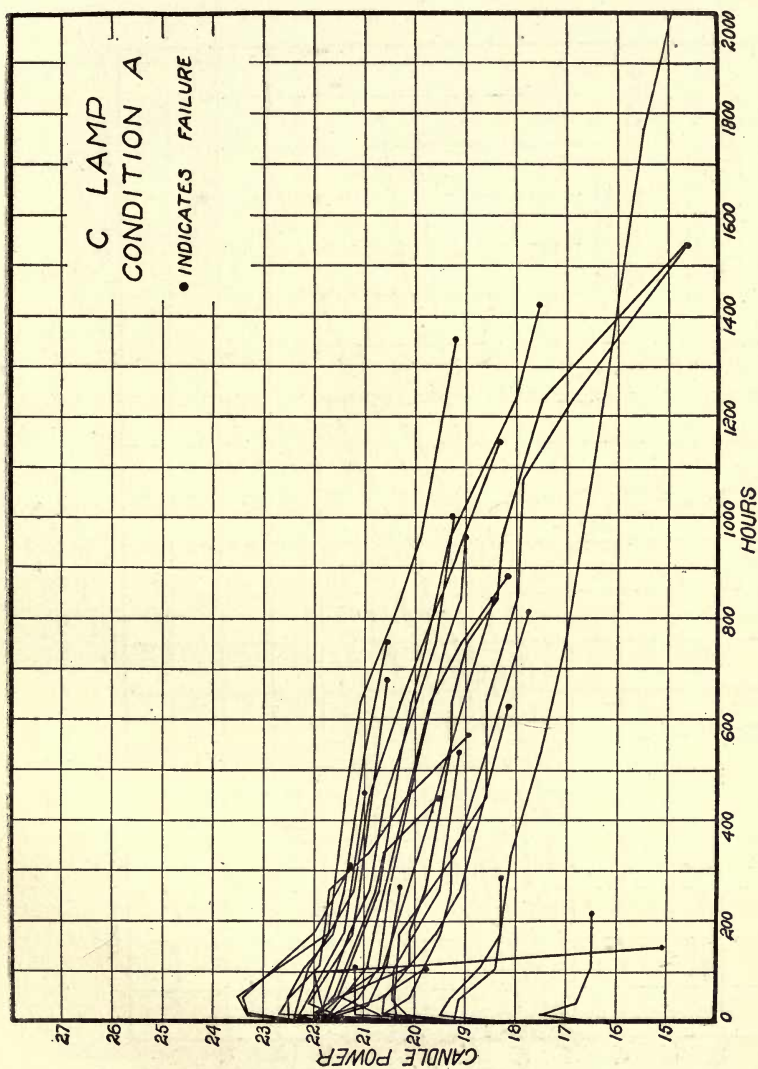


CURVES FOR C LAMPS - CONDITION A

FIG. 15

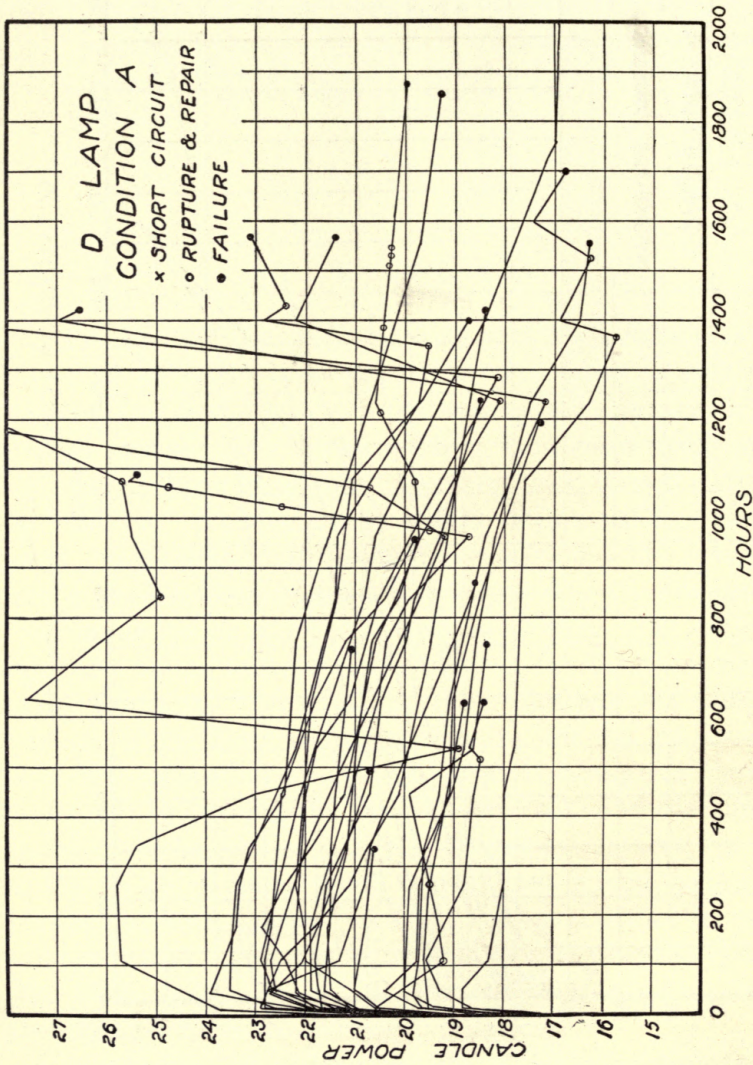


CURVES FOR D LAMPS - CONDITION A,
Fig. 16

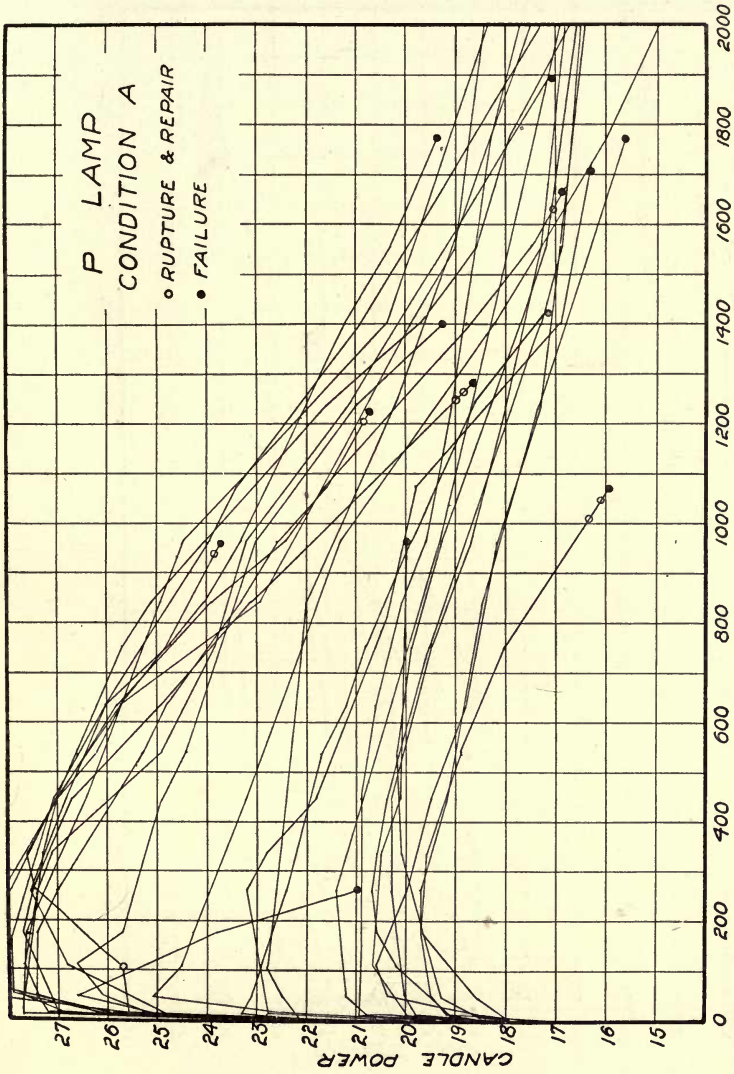


CURVES FOR P LAMPS - CONDITION A


Fig. 17

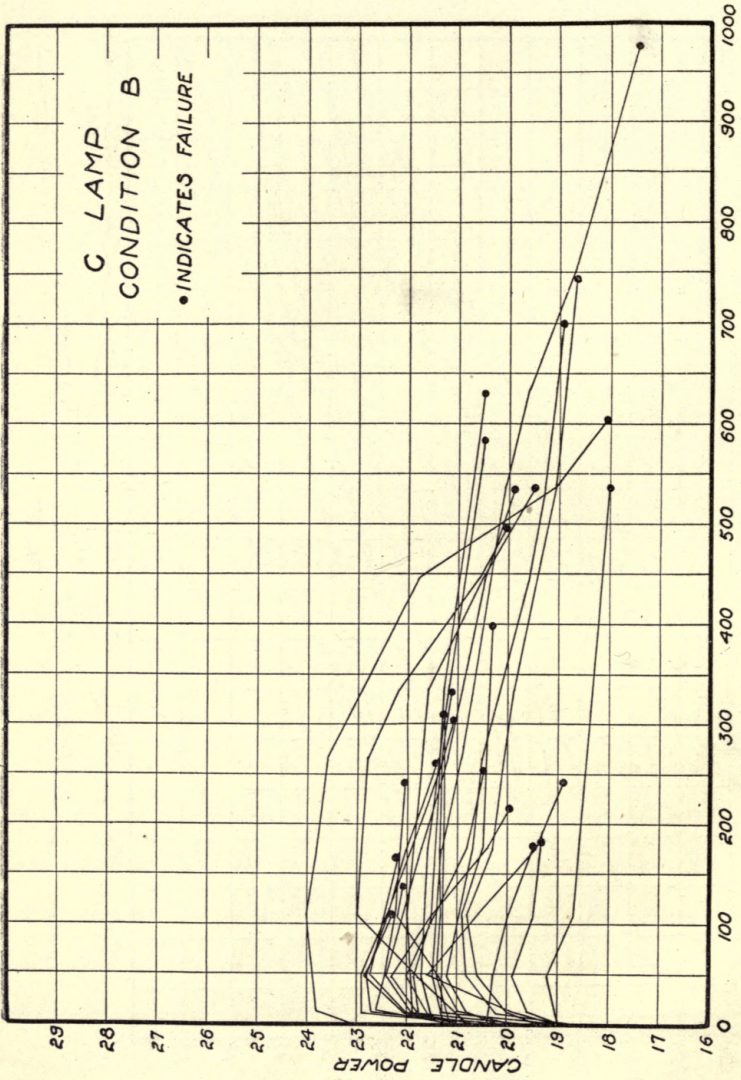

CURVES FOR C LAMP - CONDITION B.
FIG. 18

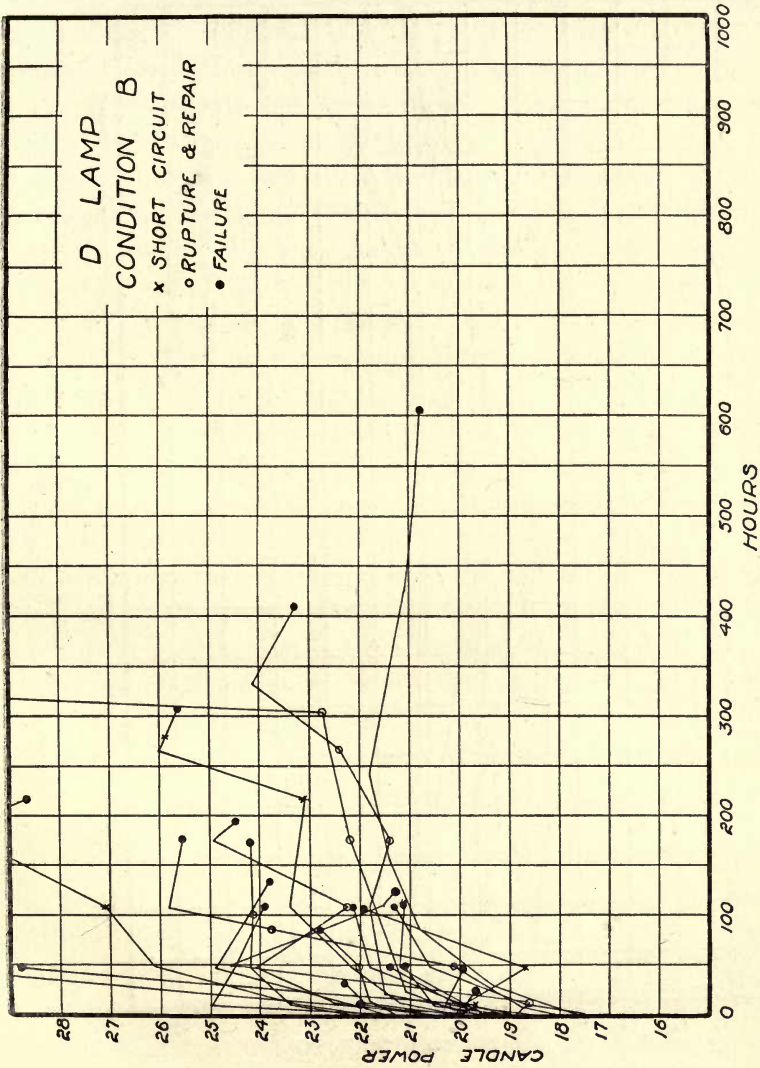

CURVES FOR D LAMP - CONDITION B.
Fig. 19

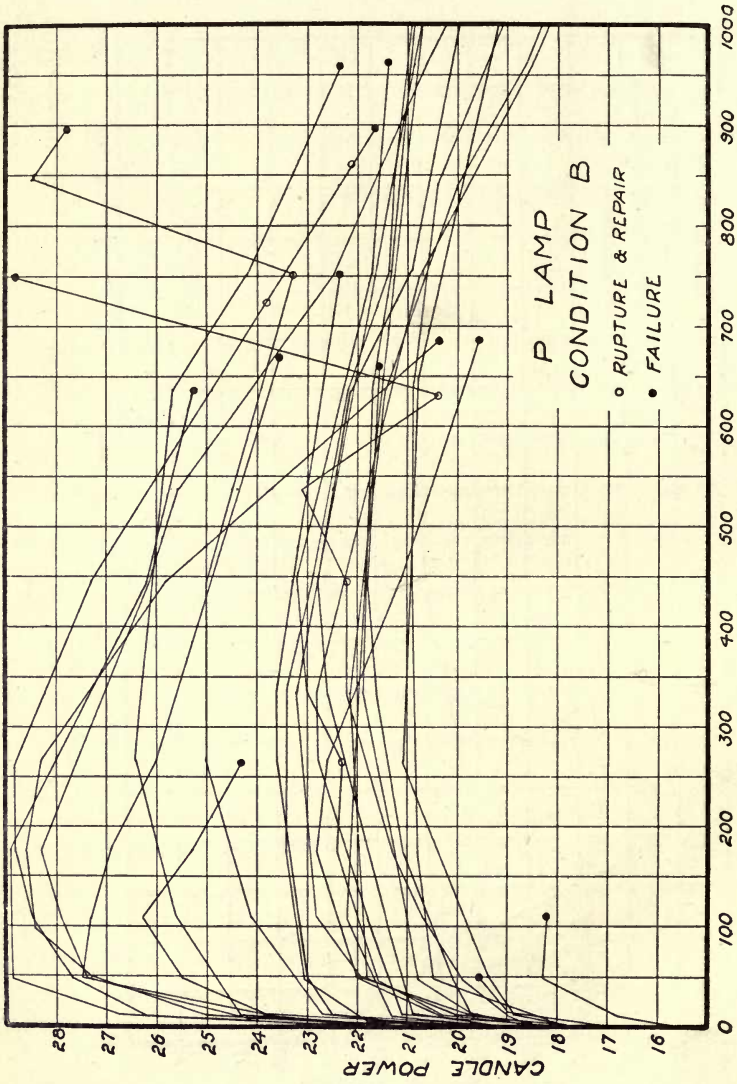

CURVES FOR P LAMP - CONDITION B
FIG. 20

en filament can be repaired. For this reason, the curves for this lamp are very uniform, not showing the sudden increases and decreases that occur in the other lamps. In the *D* lamp the filaments can easily be welded when broken, in fact it is seldom that they can not be repaired after the first rupture. The sudden increases of candle-power that are so often noticeable in the curves for this type of lamp are caused by the welding and consequent decreases in the length of the filament.

In the *C* lamp, failures commenced after about 100 hours of burning and continued steadily for about 1500 hours, when all the lamps but one were gone. Failures in the *D* lamp began at about 300 hours, and at 1900 hours only one was burning. With the *P* lamp, there was one failure at about 300 hours, and then no more until after 900 hours, when they commenced to fail at the rate of about one every hundred hours.

Compared with the results under condition A, those under condition B are rather surprising. The *D* lamp, which made a satisfactory showing under good conditions of operation, did very poorly indeed when operated under adverse conditions. At the end of 600 hours all the lamps were burned out, having an average life of only 153 hours. The *C* and the *P* lamps, as might be expected, gave poorer results than when burning under condition A, but gave a much better average life than the *D* lamps, averaging 434 and 898 hours respectively.

The explanation of the poor life of the *D* lamp under condition B is very simple. These filaments are strung so that they are under tension and the stem upon which they are mounted is supported between two spiral springs. The object of these springs is to absorb the vibrations to which the lamp may be subjected, but the springs are so strong and the stem itself is so light that instead of protecting the filament from the vibrations, they simply take them up and hold them persistently, and of course set the tightly strung filaments to vibrating also. Often some of the filaments of the lamps on test would be seen to vibrate like a violin string with an amplitude that would occasionally become great enough to allow the two sections of a filament to touch and short

circuit themselves. A slight jar would often be sufficient to start these vibrations. It happens also that the tension, mass and length of some filament sections are such that when burned upon alternating current, persistent vibrations will be set up, due either to the presence of a stray¹ magnetic field or to the magnetic repulsion and attraction action of adjacent filament sections. Upon 50-cycle current, which is common in Germany where these lamps are manufactured, some filament sections would vibrate strongly when in a magnetic field, though there were fewer that would do so than there were on 60 cycles.

On account of being mounted without tension, the filaments of neither the *P* nor the *C* lamps would vibrate upon either the 60 or 50 frequency current, unless placed in a strong magnetic field, for instance, between the poles of a horse shoe magnet. When in a strong field, the filaments of both lamps formed a node in the middle and vibrated in two sections. After a long period of burning, the *P* lamp filaments would sometimes be sufficiently contracted to put some of the filament sections under tension, and then the same persistent vibrations would be noticed in them as in the *D* lamp.

VI. CANDLE-POWER MAINTENANCE AND CHANGE IN EFFICIENCY

The curves in Fig. 21 to 24 show the changes in candle-power and efficiency for the three lamps, the curves representing the mean performance of all the lamps tested. All three lamps show the increase in candle-power during the first few hours of burning, and the subsequent falling off in candle-power that is usual with incandescent lamps. The *P* lamp, however, shows the greatest change. It also maintains the highest average candle-power throughout the test, the *D* lamp being next and the *C* lamp the lowest. After 2000 hours' burning, the average candle-power of

¹ The only magnetic field that was near enough so that there was any possibility of its affecting the lamps was due to a direct current circuit carrying 7 amperes and it was at a distance of about 8 feet from the test rack so that its effect must have been very small.

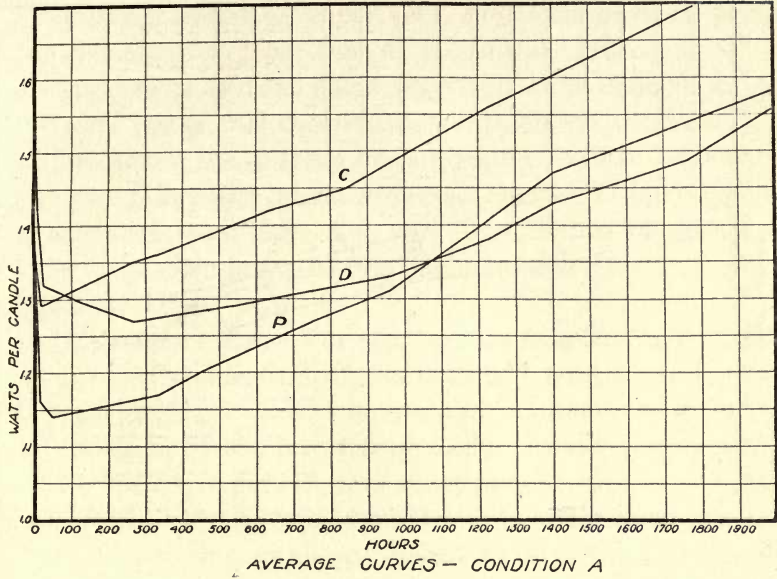


Fig. 21

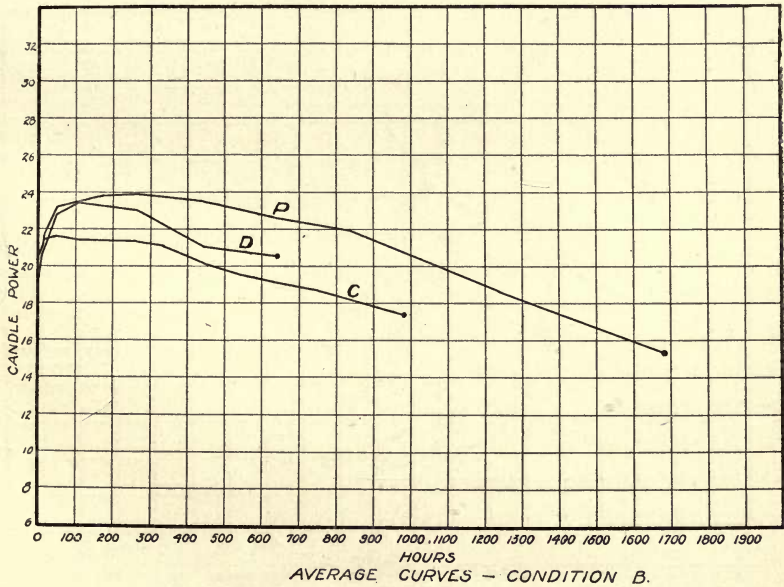


Fig. 22

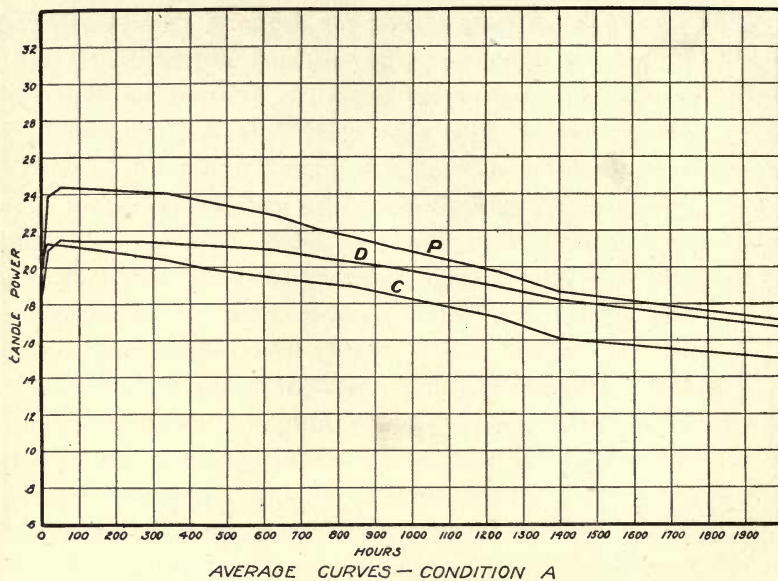


FIG. 23

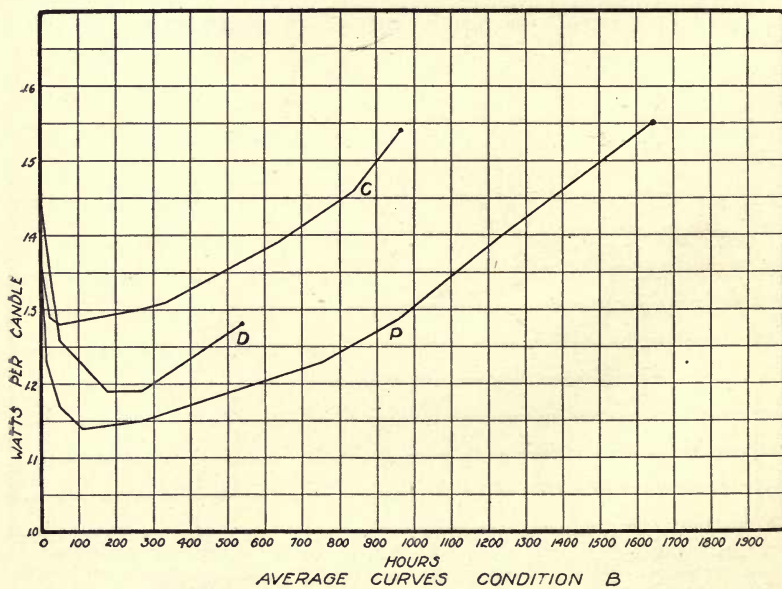


FIG. 24


the *P* lamps decreased to 88 per cent, the *D* lamps to 89 per cent and the *C* lamps to 77 per cent of the initial value.

The curves of average efficiency show the *C* lamp to have the highest watt per candle consumption throughout the tests. Up to about 1100 hours, the *D* lamp gives a poorer efficiency than the *P* lamp, but at this point the curves cross and the *D* lamp gives the better efficiency from that time on. This change in the relative efficiency of the two lamps is due to the greater blackening of the bulb of the *P* lamp.

Bulb Discoloration.—For the purpose of securing a standard by which the discoloration of the different lamps could be compared, a series of 10 carbon lamps was obtained from the Electrical Testing Laboratories of New York. These lamps had been burned for different periods and consequently carbon deposits of different densities were formed on the bulbs; they ranged in intensity from 95 per cent of the original candle-power down to 66.9 per cent. They were numbered from 1/2 to 5 as shown below.

TABLE 3

Lamp No.....	1/2	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5
Per cent C. P..	95	91.3	86.9	83	78.6	75.3	73	70.5	68.7	66.9

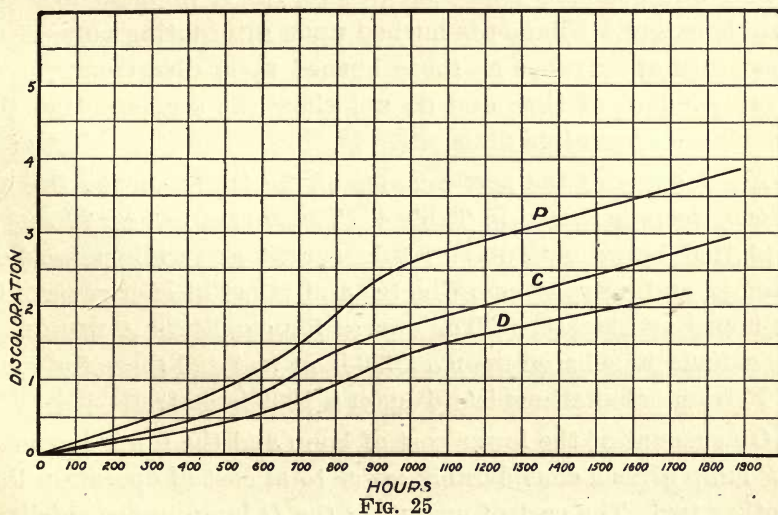


At intervals throughout the life test, the color of each tungsten lamp was compared with that of the series of carbon lamps, and the number with which it matched in color was noted. In this way the rapidity with which the tungsten lamps blackened could be determined. The lamps did not blacken uniformly over the surface, hence the darkest portion was always chosen for comparison. Fig. 25 shows the results obtained. It is plotted between hours of burning and discoloration and represents the average results of 25 lamps of each kind. The *P* lamp shows the most pronounced discoloration while the *D* lamp shows the lowest. The *P* lamps were decidedly non-uniform in the rapidity with which they blackened. Some of them would be discolored scarcely any after 1000 or 1500 hours' burning, while the others would be as black as the No. 5 carbon lamp. The *C* and *D* lamps seemed to blacken uniformly, so that at any time all of the lamps of either of these types would be discolored approximately the same amount.

In Fig. 26 are microphotographs showing the condition of the filaments after a long period of burning. In each case a new filament is shown for comparison. As might be expected, all three filaments become much roughened and pitted after a period of burning, and decrease somewhat in size, the *D* filament to a considerable extent. Filaments burned upon alternating current are the same in appearance as those burned upon direct current for the same length of time and do not show the segmentation that takes place in tantalum filaments.

A summary of the performance of the lamps on the life and efficiency tests is shown in Table 4. The curves in Fig. 27 and 28 are plotted between "Total cost in cents per candle-power-hour for lamps and energy" as ordinates and "Cost of energy per kilowatt-hour" as abscissas. The curves for condition A are drawn from calculations based upon a 2000-hour test and those for condition B from calculations based upon a 1000-hour test.

On account of the lower cost of lamp and the fewer burnouts, the *P* lamp gives a considerably lower total cost of operation than the other two. The cost of operating the *D* lamp under condition

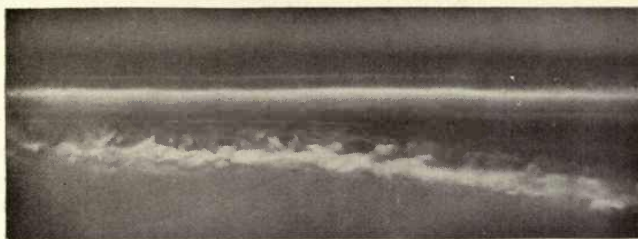

New

After burning
1000 hours

C Filament



New

After burning
1000 hours

D Filament




New

After burning
1000 hours


P Filament

FIG. 26

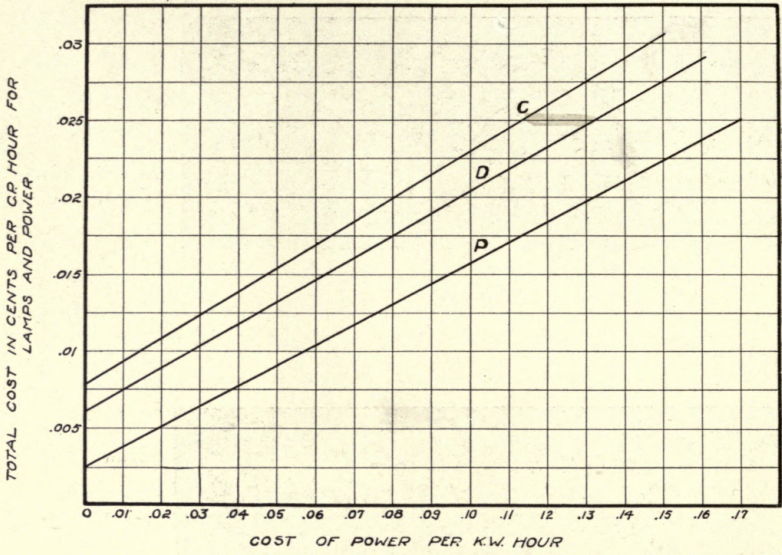

Condition A

FIG. 27

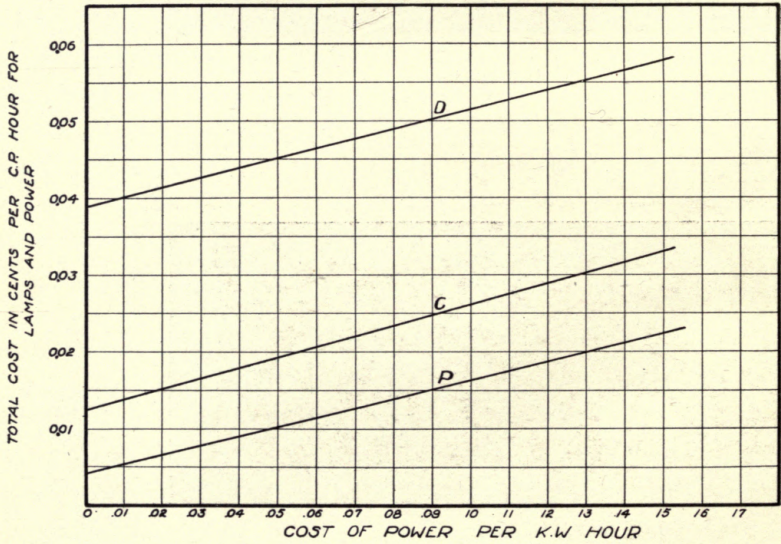

Condition B

FIG. 28

TABLE 4
SUMMARY OF LIFE AND EFFICIENCY TESTS

Lamp Operating Condition	C		D		P	
	A	B	A	B	A	B
Av. Mean Horizontal C. P.						
a. New	19.9	20.6	18.6	19.9	19.9	19.3
b. 1000 hours	18.2		19.7		20.8	20.6
c. 2000 hours	15.0		16.7		191	
Spherical Reduction Factor		.840		.730		.785
Av. Watts per Lamp	27.5	27.4	28.0	28.0	27.7	27.0
Av. Initial Watts per C. P.	1.36	1.36	1.48	1.44	1.32	1.32
Av. Life in Hours	762	434	1167	153		898
Av. C. P. through Life	18.2	20.2	19.5	22.5	20.9	22.5
Cost Lamps to run 1000 hrs.		\$62.64		\$220.05		\$23.80
" " " 2000 "	\$70.28		\$58.05		\$25.50	
C. P. Hours per Lamp	36,400	20,200	39,000	22,500	41,800	22,500
Total C. P. Hours	910,000	505,000	975,000	562,000	1,045,000	562,000
Kilowatt Hours	1,375	685	1,400	700	1,385	675
Cost of Lamps		\$1.08		\$1.35		\$.85

B is excessively high on account of the exceedingly short average life of the lamps under this condition; in fact, for power costs below 12 or 13 cents per kilowatt-hour, they are more expensive to operate than ordinary carbon filament lamps.¹

VII. CONCLUSIONS

Comparisons of the durability of filaments made by the colloid, deposition and paste processes are very difficult to make owing to the fact that the three types were all mounted differently. Undoubtedly the manner of mounting a filament has a great effect upon its life, and whether the superior life of one type of lamp is due to the fact that it has a better scheme of mounting or to the fact that the process of manufacture is better, can hardly be decided definitely from these tests. Tests of filaments made by the three processes and mounted in exactly the same way would be necessary to decide this question absolutely. From the tests just

¹ In Engineering Experiment Station Bulletin No. 19 are given the results of tests upon carbon, metallized carbon and tantalum lamps which may be compared with the results given in this bulletin for tungsten lamps. It should be said, however, that the metallized carbon and tantalum lamps used for the tests described in Bulletin No. 19 were manufactured three or more years ago and that lamps of these kinds now manufactured and put upon the market show a considerable improvement over the ones tested.

described, however, the colloid process seems to give a filament that is less durable than the other two. It is true that when tested under condition B, it gave a longer life than did the *D* lamp, but this was because its construction enabled it to withstand vibration better rather than because of the superior quality of the filament. Under condition A where vibration was eliminated and where the scheme of mounting had less effect upon the life, the *D* lamp gave a considerably longer life. The *P* lamp gave a much better life under both conditions of operation than the *C* and *D* lamps. This must be due at least in part to the fact that the filament has better lasting qualities than those made by the other processes. Under condition A, this lamp shows the same superior life as it did under condition B where differences in mounting produce great differences in average life.

Of the three schemes for mounting the filaments, that of the *C* lamp undoubtedly holds the filament more nearly in the desired place for all positions of burning than the other two. While holding it in the proper position, it at the same time holds it loosely enough so that all necessary contraction can take place without putting it under a tension that is likely to cause it to respond readily to vibrations. The principal defects of this scheme of mounting are that it lacks simplicity and that there are a large number of supporting spires that carry off by heat conduction energy that should be radiated in the form of light. For burning in a vertical pendant position or nearly so, the mounting of the filament in the *P* lamp is very good. The filament is held loosely so that contraction can take place without putting it under sufficient tension for vibration to have the serious effect upon it that it does upon the *D* filament. When burning horizontally it sags considerably, often enough to allow it to touch the glass stem supporting it. This at least gives the lamp a poor appearance even if it caused no other bad effects. The mounting of the *D* filament permits almost no distortion of the filament to take place when burning horizontally, but it has the serious fault of holding the filament in tension so that it responds readily to vibrations. The spring suspension of the supporting stem tends

to make worse the very thing that it is intended to prevent. No doubt there would be less trouble from vibration with this style of filament mounting if the stem were rigid. That there would still be bad effects from vibration even if the stem were rigid is proved by the *P* lamp. When a filament section in this lamp, which has a rigid stem, contracted sufficiently to put it under tension, as sometimes happened, it would respond to vibrations when burning under condition B in the same way that the *D* filament did, and then quickly fail. A considerable number of the newer tungsten lamps coming on the market have their filaments mounted under a slight tension, just as in the *D* lamp, but where they are to be subject to vibration, it is doubtful if they will give as good results as more loosely strung filaments would.

These tests show that the performance of tungsten lamps may vary to a surprising degree depending upon the kind of lamps used and upon the conditions under which they are burned. Some lamps will give as high operating cost as the old carbon lamps while burning under certain conditions, whereas other lamps will give good results under those same conditions. Under the best conditions, however, the tungsten lamps now on the market give excellent results. Their efficiency is maintained in a remarkable way and the life is very long, often several times what they are advertised to give.

Breakage in shipment and handling have been reduced to a small fraction of what was common in the early lamps. Only three of the three hundred lamps which were purchased for these tests were received with broken filaments, and although the lamps on some of the tests which have been described were handled dozens of times, almost no trouble was experienced so far as the breakage of filaments was concerned.

The other defect of the early lamps, that of early blackening of the bulbs, seems to have been overcome. Not one of the lamps on the tests showed any early discoloration at all, in fact, not until after about 600 hours of burning did any of the bulbs show an appreciable amount of blackening.

PUBLICATIONS OF THE ENGINEERING EXPERIMENT STATION

- Bulletin No. 1.* Tests of Reinforced Concrete Beams, by Arthur N. Talbot. 1904. (*Out of print*).
- Circular No. 1.* High-Speed Tool Steels, by L. P. Breckenridge. 1905. (*Out of print*).
- Bulletin No. 2.* Tests of High-Speed Tool Steels on Cast Iron, by L. P. Breckenridge and Henry B. Dirks. 1905. (*Out of print*).
- Circular No. 2.* Drainage of Earth Roads, by Ira O. Baker. 1906. (*Out of print*).
- Circular No. 3.* Fuel Tests with Illinois Coal. (Compiled from tests made by the Technologic Branch of the U. S. G. S., at the St. Louis, Mo., Fuel Testing Plant, 1904-1907, by L. P. Breckenridge and Paul Diserens. 1909.
- Bulletin No. 3.* The Engineering Experiment Station of the University of Illinois, by L. P. Breckenridge. 1906. (*Out of print*).
- Bulletin No. 4.* Tests of Reinforced Concrete Beams, Series of 1905, by Arthur N. Talbot. 1906.
- Bulletin No. 5.* Resistance of Tubes to Collapse, by Albert P. Carman. 1906. (*Out of print*).
- Bulletin No. 6.* Holding Power of Railroad Spikes, by Roy I. Webber. 1906. (*Out of print*).
- Bulletin No. 7.* Fuel Tests with Illinois Coals, by L. P. Breckenridge, S. W. Parr, and Henry B. Dirks. 1906.
- Bulletin No. 8.* Tests of Concrete: I. Shear; II. Bond, by Arthur N. Talbot. 1906. (*Out of print*).
- Bulletin No. 9.* An Extension of the Dewey Decimal System of Classification Applied to the Engineering Industries, by L. P. Breckenridge and G. A. Goodenough. 1906. (*Out of print*).
- Bulletin No. 10.* Tests of Concrete and Reinforced Concrete Columns, Series of 1906, by Arthur N. Talbot. 1907. (*Out of print*).
- Bulletin No. 11.* The Effect of Scale on the Transmission of Heat through Locomotive Boiler Tubes, by Edward C. Schmidt and John M. Snodgrass. 1907. (*Out of print*).
- Bulletin No. 12.* Tests of Reinforced Concrete T-beams, Series of 1906, by Arthur N. Talbot. 1907. (*Out of print*).
- Bulletin No. 13.* An Extension of the Dewey Decimal System of Classification Applied to Architecture and Building, by N. Clifford Ricker. 1907.
- Bulletin No. 14.* Tests of Reinforced Concrete Beams, Series of 1906, by Arthur N. Talbot. 1907. (*Out of print*).
- Bulletin No. 15.* How to Burn Illinois Coal without Smoke, by L. P. Breckenridge. 1908.
- Bulletin No. 16.* A Study of Roof Trusses, by N. Clifford Ricker. 1908.
- Bulletin No. 17.* The Weathering of Coal, by S. W. Parr, N. D. Hamilton, and W. F. Wheeler. 1908. (*Out of print*).
- Bulletin No. 18.* The Strength of Chain Links, by G. A. Goodenough and L. E. Moore. 1908.
- Bulletin No. 19.* Comparative Tests of Carbon, Metallized Carbon and Tantalum Filament Lamps, by T. H. Amrine. 1908. (*Out of print*).
- Bulletin No. 20.* Tests of Concrete and Reinforced Concrete Columns, Series of 1907, by Arthur N. Talbot. 1908. (*Out of print*).
- Bulletin No. 21.* Tests of a Liquid Air Plant, by C. S. Hudson and C. M. Garland. 1908.
- Bulletin No. 22.* Tests of Cast-Iron and Reinforced Concrete Culvert Pipe, by Arthur N. Talbot. 1908.
- Bulletin No. 23.* Voids, Settlement and Weight of Crushed Stone, by Ira O. Baker. 1908.
- Bulletin No. 24.* The Modification of Illinois Coal by Low Temperature Distillation, by S. W. Parr and C. K. Francis. 1908.
- Bulletin No. 25.* Lighting Country Homes by Private Electric Plants, by T. H. Amrine. 1908.
- Bulletin No. 26.* High Steam-Pressures in Locomotive Service. A Review of a Report to the Carnegie Institution of Washington. By W. F. M. Goss. 1908.
- Bulletin No. 27.* Tests of Brick Columns and Terra Cotta Block Columns, by Arthur N. Talbot and Duff A. Abrams. 1909.
- Bulletin No. 28.* A Test of Three Large Reinforced Concrete Beams, by Arthur N. Talbot. 1909.
- Bulletin No. 29.* Tests of Reinforced Concrete Beams: Resistance to Web Stresses, by Arthur N. Talbot. 1909.
- Bulletin No. 30.* On the Rate of Formation of Carbon Monoxide in Gas Producers, by J. K. Clement, L. H. Adams and C. N. Haskins. 1909.
- Bulletin No. 31.* Fuel Tests with House-heating Boilers, by J. M. Snodgrass. 1909.
- Bulletin No. 32.* Occluded Gases in Coal, by S. W. Parr and Perry Barker. 1909.
- Bulletin No. 33.* Tests of Tungsten Lamps, by T. H. Amrine and A. Guell. 1909.



UNIVERSITY OF ILLINOIS

THE STATE UNIVERSITY

THE UNIVERSITY INCLUDES THE

COLLEGE OF LITERATURE AND ARTS (Ancient and Modern Languages and Literatures, Philosophical and Political Science Groups of Studies, Economics, Commerce and Industry.)

COLLEGE OF ENGINEERING (Unexcelled library; spacious buildings; well-equipped laboratories and shops. Graduate and undergraduate courses in Architecture; Architectural Engineering; Architectural Decoration; Civil Engineering; Municipal and Sanitary Engineering; Electrical Engineering; Mechanical Engineering, Mining Engineering, Railway Engineering.

COLLEGE OF SCIENCE (Astronomy, Botany, Chemistry, Geology, Mathematics, Physics, Physiology, Zoology).

COLLEGE OF AGRICULTURE (Animal Husbandry, Agronomy, Dairy Husbandry, Horticulture, Veterinary Science, Household Science).

COLLEGE OF LAW (Three years' course).

COLLEGE OF MEDICINE (College of Physicians and Surgeons, Chicago). (Four years' course).

COLLEGE OF DENTISTRY (Chicago). (Three years' course).

SCHOOLS—GRADUATE SCHOOL, MUSIC (Voice, Piano, Violin), **LIBRARY SCIENCE, PHARMACY** (Chicago), **EDUCATION, RAILWAY ENGINEERING AND ADMINISTRATION.**

A Summer School with a session of nine weeks is open each summer.

A Military Regiment is organized at the University for instruction in Military Science. Closely connected with the work of the University are students' organizations for educational and social purposes. (Glee and Mandolin Clubs; Literary, Scientific, and Technical Societies and Clubs, Young Men's and Young Women's Christian Associations).

United States Experiment Station, State Laboratory of Natural History, Biological Experiment Station on Illinois River, State Water Survey, State Geological Survey

Engineering Experiment Station. A department organized to investigate problems of importance to the engineering and manufacturing interests of the State.

The Library contains 122,000 volumes and 14,000 pamphlets.

The University offers 526 Free Scholarships.

For catalogs and information address

W. L. PILLSBURY, Registrar,

Urbana, Illinois.

**THIS BOOK IS DUE ON THE LAST DATE
STAMPED BELOW**

**AN INITIAL FINE OF 25 CENTS
WILL BE ASSESSED FOR FAILURE TO RETURN
THIS BOOK ON THE DATE DUE. THE PENALTY
WILL INCREASE TO 50 CENTS ON THE FOURTH
DAY AND TO \$1.00 ON THE SEVENTH DAY
OVERDUE.**

JUL 1 1936	

Univ.

193691

TAI

I 35

v 33

